

Image Data Hiding in Reversible System Based on Image Histogram Transformation Method and AIHTM

Nitesh Kumar, Department of EC, SVCST, Bhopal, India; niteshsunny.1217@gmail.com
Dharmendra kumar singh, Department of EC, SVCST, Bhopal, India; singhdharmendra04@gmail.com
Sushma Kushwaha, department of CSE, SVCST, Bhopal, India; sushmamini.19@gmail.com

Abstract- Digital image information presently, a replacement reversible image transformation technique is planned, this system not only enhances the standard of the encrypted image however additionally it will restore the key image in lossless manner. It maintains the wonderful property that the initial image cowl is losslessly recovered once information embedded is extracted whereas protective the image content's as confidential. Existing methodology of reversible information hiding in encrypted Image supported Reversible Image Transformation. Different from all existing secret writing ways, existing methodology primarily based methodology allow user to transmute the information of original image into another target image with constant size. that secure the initial image, the transmuted image that looks like the target image that is used because the encrypted image, and therefore the transmutation is done between the small blocks with little size, that enhance the standard of the encrypted image. During this survey paper totally different reversible information hiding ways are analyzed. Our principle finds best the PSNR as compare existing methodology and recover original image.

Keywords— Reversible data hiding, Image encryption, Image Histogram, Image Visibility, PSNR, Data Hiding, Privacy protection.

I. Introduction

Data hiding is that the method cowl} knowledge (representing some information) into cover media. That is, the information hiding method links 2 sets of information, a group of the embedded information and another set of the cover media information. The relationship between these 2 sets of information characterizes totally different applications for example, in covert communications; the hidden information could typically be immaterial to the cover media. In authentication, however, the embedded information is closely associated with the duvet media. In these 2 kinds of applications, invisibleness of hidden information is a vital demand. In most cases of information hiding, the duvet media can expertise some distortion because of knowledge hiding and can't be inverted back to the initial media. That is, some permanent distortion has occurred to the cover media even when the hidden information is extracted out. [1].Data security ways are classified into 3 major classes. These are cryptography, watermarking and steganography. In cryptography the information is encrypted into indecipherable kind. So, that it becomes disorganized [2]. Since cipher text has

Unmeaning kind and so simply stimulates the curiosity of cruel attackers who are willing to recover or destroy information. However it doesn't encourage the existence of the message [3].In some applications, like diagnosing and enforcement, it's vital to reverse the marked media back to the initial cover media once the hidden information are retrieved for a few legal concerns. In different applications, like remote sensing and high-energy particle physical experimental investigation, it's conjointly desired that the initial cover media will be recovered due to the specified high-precision nature. The marking techniques satisfying this demand are mentioned as reversible, lossless, distortion-free, or invertible information hiding techniques. Reversible information hiding facilitates huge risk of applications to link 2 sets of information in such how that the duvet media will be losslessly recovered once the hidden data are extracted out, therefore providing a further a venue of handling 2 totally different sets of information. Reversible information hiding (RDH) in pictures may be a technique, by that the initial cover will be losslessly recovered once the embedded message is extracted. This vital technique is wide utilized in medical representational process, military representational process and law forensics, wherever no distortion of the initial cover is allowed [4, 5].



Fig1 RDH Process Diagram

Histogram is represent graphical illustration is comparable to a chart that organizes a bunch of information points into user-specified ranges. The bar chart condenses an information series into a simply understood visual by taking several data points and grouping them into logical ranges or bins. A bar chart could be a graphical show of information exploitation bars of various heights. The horizontal axis of the graph represents the colour variations, whereas the vertical axis represents the quantity of pixels therein explicit color. The bar chart compresses an information series into a simply understood visual by taking several data points and grouping them into logical ranges. It plots the quantity of pixels for every tonal value. An image bar chart may be a graphical illustration of the pixels intensities distribution in a picture. Histograms are created of bins, every bin representing a definite intensity price vary. The bar chart is computed by examining all picture elements

within the image and assignment every to a bin looking on the pixel intensity. The peak of a bin represents the quantity of pixels appointed to that. The amount of bins within which the full intensity vary is split is sometimes within the order of the root of the quantity of pixels [6].

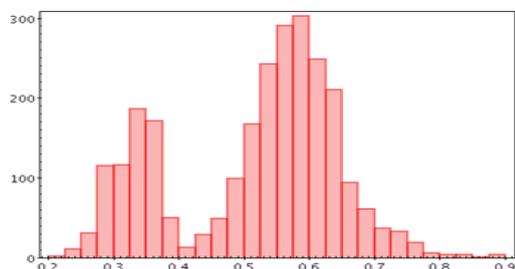


Fig 2 Histogram Diagram

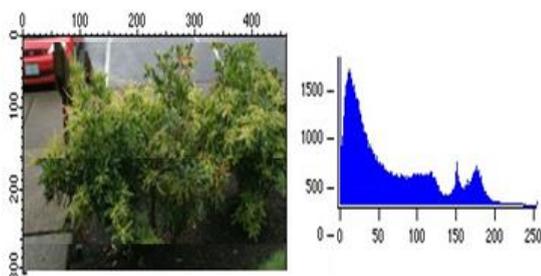


Fig3 image convert into image bar chart

Moreover, this distinction may modification with pictures, applications and even at intervals one image. However, within the current literature several innovative characteristics and options are projected to explain the image content and determine content modifications. Many image process operations are listed in Tables one and a couple of Operations given one preserve image content in most cases and so authentication ways have to be compelled to tolerate them. Table two lists manipulations that modification the image content and so they have to be detected by selective authentication ways [7].

II. LITERATURE REVIEW

Lots of research has been done in the area of reversible data hiding. In last few years various efficient methods have been proposed for reversible data hiding. Some noticeable work in area of reversible data hiding is as follows:

Zhang [8] suggests a novel method for separable reversible data hiding. Here content owner first encrypts the original uncompressed image using an encryption key to produce an encrypted image. Then, the data-hider compresses the least significant bits (LSB) of the encrypted image using a data-hiding key to create a sparse space to accommodate the additional data. At the receiver side, the data embedded in the created space can be easily retrieved from the encrypted image containing additional data according to the data-hiding key. Since the data embedding only affects the LSB, a decryption with the encryption key can result in an image similar to the original version. When using both of the encryption

and data-hiding keys, the embedded additional data can be successfully extracted and the original image can be perfectly recovered by exploiting the spatial correlation in natural image

K. Ma [9] proposed a novel method for RDH in encrypted images, for that method they do not "vacate room after encryption" as done previously but "reserve room before encryption with a traditional RDH algorithm, and thus it is easy for the data hider to reversibly embed data in the encrypted image. The proposed method can achieve real reversibility that is data extraction and image recoveries are error free. First up all they empty out room by embedding LSBs of some pixels into other pixels with a traditional RDH method and then encrypt the image, so the positions of these LSBs in the encrypted image can be used to embed data. Not only the proposed method separate data extraction from image decryption but also achieves excellent performance.

F. Mintzer et al. in [10]. Images marked with reversible visible watermark were posted on the Internet for application in their digital library. The watermarked image was in the form of a puzzle that the users could obtain easily using a program for an extra fee, removing the watermark and thus reconstructing the original image.

Z. Ni, et al. [11] Presented a Robust Reversible Data Hiding (RRDH) scheme to avoid the salt-and-pepper noise. The host image is initially categorized into blocks of size 8×8 by using the Error Correction Coding (ECC) and permutation methods. In order to realize reversibility of the image and robustness if the image is subjected to JPEG compression, the proposed method is quite effective.

Xinpeng et al. [12] this correspondence proposed a lossless, reversible and data hiding schemes for public-key-encrypted images probabilistic and homomorphic properties of cryptosystems. With these schemes, the pixel division/reorganization is avoided and the encryption/decryption is performed on the cover pixels directly so that the amount of encrypted data and the computational complexity are lowered. Due to data embedding on encrypted domain may result in a little bit distortion in plaintext domain due to the homomorphic property, the embedded data can be extracted and the original content can be recovered from the directly decrypted image. With the combined technique, a receiver may extract a part of embedded data before decryption, and extract another part of embedded data and recover the original plaintext image after decryption.

C. Anuradha et al. [13] proposed a secure and authenticated discrete reversible Data hiding in cipher images deals with security and authentication. In the first phase, a content owner encrypts the original uncompressed image using an encryption key. Then, a data hider may compress the least significant bits of the encrypted image using a data hiding key to create

a sparse space to accommodate some additional data. With an encrypted image containing additional data, if a receiver has the data hiding key, receiver can extract the additional data though receiver does not know the image content. If the receiver has the encryption key, can decrypt the received data to obtain an image similar to the original one, but cannot extract the additional data. If the receiver has both the data hiding key and the encryption key, can extract the additional data and recover the original content without any error by exploiting the spatial correlation in natural image when the amount of additional data is not too large. It is also a drawback because if the receiver has any one key as known, and then he can take any information from the encrypted data. In order to achieve authentication SHA-1 algorithm is being used

Chen et al [14] observed that RDH scheme for an encrypted signal is developed by taking digital image as an illustration for description. While encryption the image, each pixel value was divided into two parts. Those two parts are Most Significant Bits (MSBs) numbering seven and one LSB and these parts are encrypted. Based on the principles of homomorphism modification was effected to two encrypted LSBs of each encrypted pixel pair in order to reversibly embed one secret bit. This enables the receiver to retrieve the embedded bits easily and recover the original image which is possible by ascertaining the relationship between two decrypted LSBs in each pixel pair. But, the intrinsic overflow could not be averted

KokSheik Wong ET. al. [15] introduced RDH in videos. Information was implanted into a compressed video by concurrently manipulating Mquant and quantized DCT coefficients, the significant parts of MPEG and H.26x-based compression standards. When fed into an ordinary video decoder, the modified video can reconstruct the original video even at the bit-to-bit level. Reverse zero run length (RZL) was used to deed the statistics of macro block for realizing high embedding efficiency trading off the payload.

III. Result Analysis and Matlab Tool

MATLAB version 13 is a high-level technical compute language and interactive environment for algorithm development, data visualization, records analysis, and numeric computation. Matlab is a software program that allows you to do data manipulation and visualization, calculations, math and programming. It can be used to do very simple as well as very sophisticated tasks. Database, analysis, visualization, and algorithm development. You can perform efficient data retrieve enhancement. Many functions in the toolbox are multithreaded to take benefit of multicore and multiprocessor computers. The key features of MATLAB, a high level language has: Interactive Environment for iterative exploration, design and problem solving, Mathematical function for statistics, filtering, numerical analysis and solving the equations. Database analysis and retrieval fine data in dataset. Development tools for improving code quality and

maximizing performance. Tools for structure use with custom graphical interfaces. It has following functionality for data analysis: Analyzing Data healthcare, Acquiring Data, Visualizing Data, text and documenting analysis. Our experimentation one images like white-flower-edward-myers image in jpg size 28.2 KB and dimension 600x428 as a host image and adhere images image as data image in jpg size 10.2 KB and dimension 282x179 as a data image

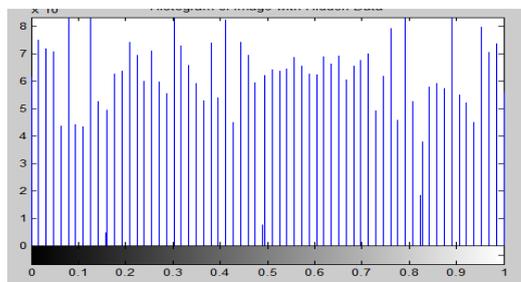


Fig4 old method

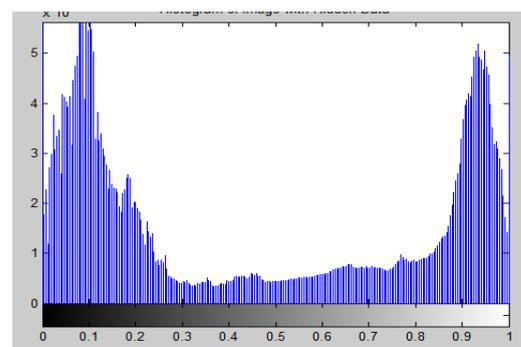


Fig5 New method

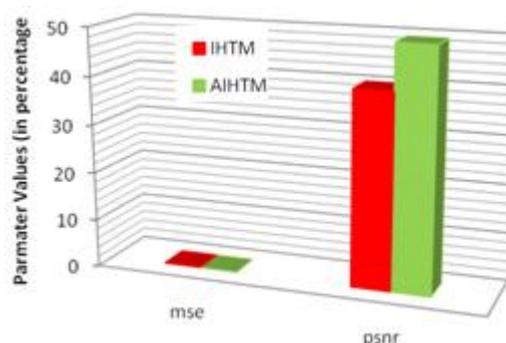


Fig6 compare between old method and New method

VI. Conclusion

Our proposed method an image advanced image histogram transformation method (AIHTM) and proposed method a is robustness is good as comparing existing image histogram transformation method(IHTM).Reversible information hiding schemes for encrypted image with a low computation quality is analyzed, that consists of image secret writing, information hiding and knowledge extraction/ image recovery phases. The initial pictures are encrypted by a secret writing strategy. Therefore a study regarding a secret writing strategy is per-formed. Though an information hider doesn't know the initial content, he will insert the key information into the encrypted

image by modifying a section of encrypted information. Therefore ways for information embedding also are detected. information hiding in encrypted image by reversible image transformation, which might transform a secret image to at random designated target image for obtaining an encrypted image which is employed because the secret writing of secret image with smart visual quality, and therefore the secret image will be improved with none loss. It will defend the image content. Therefore it's interesting to implement IHTM in encrypted pictures, by that the cloud server will reversibly insert information into the image how-This kind of attack may be useful against encryption techniques based on changes on pixels positions or transformations which do not alter significantly the histogram of an image. An advanced image histogram transformation method (AIHTM) compared to the existing image histogram transformation method (IHTM), the proposed method highly improves the embedding rate, as well as the PSNR of the image, is also good. The above work is simulated using MATLAB simulation tool. The Mean square Error (MSE) should be most between the initial image and therefore the encrypted image and therefore the PSNR should be low as a result of PSNR is inversely dependent on the MSE.

Reference

- [1]. M. Johnson, P. Ishwar, V. Prabhakaran, D. Schonberg and K. Ramchandran. 2004. On compressing encrypted data. *IEEE Trans. Signal Process.* 52(10): 2992-3006.
- [2]. X. Zhang, G. Feng, Y. Ren and Z. Qian. 2012. Scalable coding of encrypted images. *IEEE Trans. Image Process.* 21(6): 3108-3114.
- [3]. R.H. Chan, F.R. Lin, K.M. Yeung. 2001. A frequency domain based watermarking scheme with spatial repetition coding. *Proceedings of the 5th World Multiconference on Systemic, Cybernetics and Informatics.* VI: 35-40, Orlando.
- [4]. F. Bao, R. H. Deng, B. C. Ooi, et al., "Tailored reversible watermarking schemes for authentication of electronic clinical atlas," *IEEE Trans. on Information Technology in Biomedicine*, vol. 9, no. 4, pp. 554-563, Dec. 2005.
- [5]. J. Tian, "Reversible data embedding using a difference expansion," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 13, no. 8, pp. 890-896, Aug. 2003.
- [6]. G. A. Sathishkumar, Srinivas Ramchandran and K. Bhoopathy Bagan "Image Encryption Using Random Pixel Permutation by Chaotic Mapping", *IEEE Symposium on Computers and Informatics*, 2012.
- [7]. Dittmann J, Steinmetz A Content-based digital signature for motion pictures authentication and content-fragile watermarking. In: *Proceedings of the IEEE international conference on multimedia computing and systems*, vol II. Florence, Italy, pp 209-213, 1999.
- [8]. X. Zhang, "Separable reversible data hiding in encrypted image," *IEEE Trans. Inf. Forensics Security*, vol. 7, no. 2, pp. 826-832, Apr. 2012.
- [9]. K. Ma, W. Zhang, X. Zhao, N. Yu, F. Li, "Reversible data hiding in encrypted images by reserving room before encryption," *IEEE Trans. on Information Forensics and Security*, vol. 8, no. 3, pp. 553-562, Mar. 2013.
- [10]. F. Mintzer, J. Lotspiech, and N. Morimoto, "Safeguarding digital library contents and users: Digital watermarking," *D-Lib Mag.*, Dec. 1997.
- [11]. Z. Ni, Y. Q. Shi, N. Ansari, W. Su, Q. Sun and X. Lin. 2008. Robust lossless image data hiding designed for semi-fragile image authentication. *IEEE Trans. Circuits Syst. Video Technol.* 18(4): 497-509.
- [12]. Xinpeng Zhang, Jing Long, Zichi Wang, and Hang Cheng, "Lossless and Reversible Data Hiding in Encrypted Images with Public Key Cryptography," *IEEE Trans. on Circuits and Systems for Video Technology*, 2015.
- [13]. C. Anuradha and S. Lavanya "A secure and authenticated reversible Data hiding in encrypted images" 2013, *IJARCSSE*.
- [14]. Y. C. Chen, C.-W. Shiu and G. Horng. 2014. Encrypted signal-based reversible data hiding with public key cryptosystem. *J. Vis. Commun. Image Represent.* 25(5): 1164-1170.
- [15]. KokSheik Wong, Kiyoshi Tanaka, Koichi Takagi and Yasuyuki Nakajima, "Complete Video Quality Preserving Data Hiding," *IEEE Transactions on Circuits and Systems for Video Technology*, vol:19, pp: 1499- 1512, 2009.
- [16]. Handling Noise in Single Image Deblurring victimization Directional Filters, Lin Zhong, Sunghyun Cho, Dimitris Metaxas, Sylvain Paris, Jue Wang, Rutgers University, Adobe analysis.
- [17]. S. Morigi, L. Reichel, F. Sgallari, and F. Zama, associate reiterative technique for linear separate ill-posed issues with box constraints, *J. Comput. Appl. Math.*, 198 (2007), pp. 505-520.
- [18]. R. C. Gonzalez and R. E. Woods, *Digital Image process*, apprentice Hall, New Jersey, 2008.
- [19]. Ken cabeen and Peter Gent, "Image Compression and also the discrete circular function Transform "Math forty five, College of the Redwoods.
- [20]. M. A. Shaikh a, S. B. Sayyad," Color Image Improvement Filtering Techniques For Agricultural Domain mistreatment MATLAB", *ISPRS TC VIII International conference on "Operational Remote Sensing Applications: Opportunities, Progress and Challenges"*, Hyderabad, India, December nine - twelve, 2014.
- [21]. Jyoti Dadwal and Bhubneshwar Sharma*, "Image process technique used for improvement image application method in physical science engineering", *International Journal of Advances in research project 2015*; 1(10): 356-358.