

Survey on Reversible Data Hiding Algorithms in Encrypted Images (RDHAEI) with Histogram

Ambika Sewaniya ¹, Prof. Surendra Chadokar ²

Department of CSE, LNCTS, Bhopal, India

¹ambika.sewaniya@gmail.com, ²surendrachadokar1984@gmail.com

ABSTRACT: Reversible information hiding may be a wide used technique on the idea of watermarking. The host image will be recovered specifically. Reversible information activity technique is applied at medical and military applications. the information embedding method can sometimes introduce permanent loss to the cover medium. In many fields like medical, military, and law forensics degradation of cover isn't allowed. Reversible information activity algorithms in encrypted pictures (RDHAEI) with bar graph, since it maintains the excellent property that the first image cover will be losslessly recovered once information embedded is extracted whereas protective the image content's as confidential. Reversible information activity techniques recover the first carrier specifically once the extraction of the key encrypted information. Reversible information concealment Techniques are classified supported the strategy of implementation. During this paper a survey on the various techniques applicable supported distinction expansion, bar graph shifting. during this survey paper totally different reversible information hiding strategies are analyzed. All previous strategies insert information by reversibly encrypted pictures and information extraction and/or image restoration. Reversible information concealment that permits pictures to information in hidden type and improved to their origin by removing digital hidden information.

Keywords- Reversible data hiding, Image Data privacy protection, RDHAEI, PSNR.

I. INTRODUCTION

In present continuously new devotion is funded to reversible information concealing in encoded pictures. in the meantime it defends the outstanding assets that the first cover may be losslessly improved after embedded information is deleted whereas defensive the image content privacy. With the broad, universal use of the web, it's presently needed to encode delicate information earlier transmission to defend those information. Reversible information concealing ways will ensure that the receiver which may receive hidden messages and find well required information while not distortion. Reversible data-hiding has established wide attention since retrievable media are additional valuable once protective the protection and privacy of

sensitive info. for instance, assume that the actual data of a patient is personal data and also the patient's X-ray image is employed as cover media. it's important to recover X-ray image with none loss of detail when ill the patient's personal data. Presently, there are 3 helpful domains employed in reversible data-hiding systems [1] spatial domain, distorted space and also the density compression field. In spatial domain pixels of the quilt image convert on to hide the information and within the distorted space the quilt image is method through a transform method to achieve frequency coefficients [2]. After frequency constant is increased to cover information. within the compression domain for modified to cover the information compression code is employed. Digital Steganography and Watermarking are 2 primitive techniques for act secrete information in appropriate carriers like image, audio and video files. These techniques could distort the first image when extracting the hidden information. These may be used for copyright protection, media registration, integrity authentication etc. The embedding method sometimes distorts the first cover image that carries secret information for good. however in applications of medical image process, military and forensics, degradation of original cover can't be allowed. to beat this disadvantage a technique that may recover the first image while not distortion when the extraction of the key information came into existence. it had been referred to as reversible information concealing (RDH) or lossless information concealing. It embeds invisible information referred to as payload or secret or hidden information into a digital image referred to as cover image during a reversible manner. Figure one shows the diagram of RDH. Reversible information concealment restores original image once the extraction of the key information with negligible distortions and truthful quality. therefore RDH techniques are becoming widespread. From a secure communication system's read RDH embeds some digitized data in a picture so only AN authenticated party will extract the hidden data and restore the first image. AN data activity system is characterized supported four completely different aspects: capability refers to the number of hidden data the cover media will accommodate. Security refers to the feature enclosed to shield the extraction of the hidden data by a hacker. physical property is that the ability to note the hidden data. strength is that the ability

to resist modifications on the stego medium while not distorting the hidden data. customary RDH algorithms are essentially classified into 3.

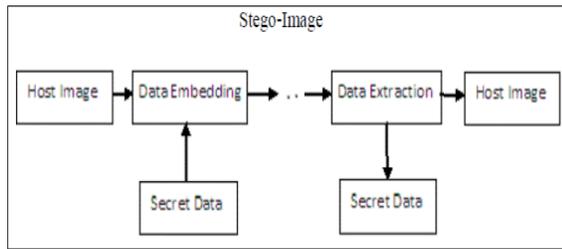


Figure 1: Reversible data hiding algorithms in encrypted images (RDHAEI) with histogram

The primary class of algorithms follow lossless compression embedding framework (LC)[3]. In it, a twin feature is computed for a try of component and compressed. Messages are embedded within the further house left by lossless compression. The second classes of algorithms are supported distinction expansion (DE)[4]. Data embedding after the secret writing method, the information hider place up the encoded image, and insert restricted information into it. the information} hider will it modification the first image and only can manage the access to the embedded data. information extraction and image secret writing the information} mining and data extraction entirely differs from image secret writing. 2 completely different case are taking to point out.

Case1: Extracting information from encoded images: The management simply becomes the privileges to own the information} concealing key and manage data in encoded space. It will decipher the LSB-planes and removes the additional information. The proof of encrypted pictures is economical complete LSB replacement. the whole method is finished by the encrypted image, wherever it avoids the escape of original information.

Case2: Removing information from decrypted images: The inserting and removal of information is complete through the encrypted space. however the image decrypted by operator and also the information extracts from decrypted space. F. bar graph shrinks and image secret writing the data concealing technique has been shaped in 2 sets of information, a collection of inserted information and defend broadcasting. within the information concealing techniques, defend media become distorted and it doesn't revert back the first information. The defend media created by stable distortion once the deduction of hidden data[5].

Major application areas of reversible information concealing: Reversible information concealing is technique to insert the extra message within some distortion unacceptable cowl media. this is often the technique that's principally used for the authentication of information like pictures, videos, electronic documents. As long as image is concerned the technique may be helpful in space of protection and transmission of secret sensitive military and medical pictures. In applications like in enforcement, medical pictures systems, it's desired to be able to reverse the stegno media back to the first cowl media for legal thought. The remote sensing and military imaging, high accuracy is needed. In some research, experimental information is high-priced to be achieved. Below these circumstances, the changeability of the first media is desired. the information activity scheme satisfying these demand is referred as lossless. allow us to contemplate AN example, suppose a medical image info is keep during an information center and server within the information center, And insert notations into an encrypted version of a medical image through an RDH technique. With the notations the server will manage the image or verify its integrity while not having the data of the first content, and so the patient's privacy is protected. On the opposite hand, a doctor, having the cryptologic key, will decipher and, a doctor, having the cryptologic key, will decipher and restore the image during a reversible manner for the aim of additional diagnosis. so chief application space of reversible information concealing is in IPR protection, authentication, military, medical and law enforcement[6].

II.RELATED WORK

In [7] Weiming Zhang et al.[7] has proposed a framework for reversible data hiding for embedding data in an image by reserving room before encryption. Since losslessly vacating room from the encrypted images is relatively difficult and sometimes inefficient.

In Mintzer et al. in [8]. Images marked with reversible visible watermark were posted on the Internet for application in their digital library. The watermarked image was in the form of a puzzle that the users could obtain easily using a program for an extra fee, removing the watermark and thus reconstructing the original image

In [9] Jui Tian et al. by has introduced a difference expansion technique which discovers extra storage space by exploring the redundancy in the image content. Both the secret data holding capacity limit and the visual quality of embedded images of the DE method are among the best in the literature, along with a low computational complexity.

In Zhenxing et.al [10] suggested method targeting at encrypting a JPEG bit stream into an appropriately ordered structure, and then embedded a secret message into this encrypted bit stream by marginally modifying the JPEG stream. The secret message bits were encoded using the error correction codes to attain a complete data extraction and image recovery.

In [11] Wen-Chung Kuo et al. by has proposed a new method of adaptive reversible data hiding based on histogram. In order to enhance the data hiding capacity and embedding point adaptively a new scheme was proposed based on histogram and slope method. This method keeps the embedding capacity high and also maintains the high quality of stego-image.

In Yi-Pei et.al [12] proposed RDH for embedding data in VQ-compressed codes formed on the basis of the de-clustering strategy and the similarity property of neighboring areas in a normal image. They proposed two de-clustering methods, one using the minimum spanning tree and the second using short-spanning-path algorithms. With this proposed method original cover index table could be recovered from the stegoed index table. Here the embedding capacity depended on image context, codebook size, and the number of the de-clustered groups.

Siddharth Malik et al. in [13] has proposed another promising approach for color visual cryptography which involves three main steps that are Sieving, Division and Shuffling to generate random shares. This approach promises the minimal computation requirement for generation of the original secret image from the random shares without any loss of image quality.

In [14] Bhaskara Reddy, et.al suggested an Effective Algorithm of Encryption and Decryption of Images Using Random Number Generation Technique and Huffman coding .The implemented security for image used the random number generator. It uses an image read its pixels and convert it into pixels matrix. The matrix of order as height and width of the image. It changes that pixels into some fixed numbers. It generates the key using random generation technique. Encrypting the image using this key. It performing random transposition on encrypted image. Converting it into one dimensional encrypted array. Finally applied Huffman coding on that array. Due to this size of the encrypted image is reduced. The image is encrypted with the data used. The decryption is reverse process of encryption. Hence the proposed method provides a high security for an image with minimum memory usage

In [15] Koo Kang, G et al. by introduces a color visual cryptography encryption method that produces

meaningful color shares via visual information pixel synchronization and error diffusion halftoning.

In Wen-Hsiang Tsai1 et al. [16] proposed a lossless data hiding method based on histogram shifting. It employs a method of adaptive division of cover images into blocks. To use large data hiding capacities as well as high stego image qualities. The method is to break a bottleneck of data hiding rate increasing at the image block size of 8×8 . It is found in existing histogram shifting methods. Four ways of block divisions are designed. The method provides the largest data hiding capacity is selected area. To use the histogram shifting method. Histogram shifting used in an easy way to find out the encrypted images.

In [17] Wei Qiao et al. have proposed a new secret visual cryptography scheme for color images based on halftone. Firstly a chromatic image is decomposed into three monochromatic images in tone cyan, magenta and yellow. Secondly, these three images are transformed into binary images by halftone technique. Finally, the traditional binary secret sharing scheme is used to get the sharing images.

III.EXPECT OUTCOME

In research in field image processing in reversible data hiding algorithms in encrypted images (RDHAEI) with histogram and image data secure, more authentications and more PSNR.

IV. CONCLUSION

Reversible information concealment algorithms in encrypted pictures (RDHAEI) with bar chart recovers the first carrier specifically when the extraction of the key encrypted information. Applications like medical representational process, military and forensics use these techniques for copyright protection, media registration, integrity authentication etc. the various techniques used for reversible information concealment over the last 20 years like lossless compression, differential expansion, bar chart shifting, prediction error and its variations were mentioned. A survey on numerous Reversible information concealment algorithms is performed. Reversible information concealment schemes for encrypted image with a low computation quality is analyses, that consists of image secret writing, information concealment and information extraction/ image recovery phases. the first pictures are encrypted by AN secret writing strategy. Therefore a study concerning a secret writing strategy is performed. Though a data ledge an information hider doesn't know the first content, he will implant the key information into the encrypted image by modifying an area of encrypted information. Therefore ways for information embedding are become aware.

REFERENCES

- [1]. Xinpeng Zhang, Jing Long, Zichi Wang, and Hang Cheng "Lossless and Reversible Data Hiding in Encrypted Images with Public Key Cryptography" 1051-8215 (c) 2015 IEEE. Personal use is permitted, but republication /redistribution requires IEEE permission. .
- [2]. J. Tian, "Reversible data embedding using a difference expansion," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 13, no. 8, pp. 890-896, Aug. 2003.
- [3]. Ashwak Mahmood Alabaichi "Color Image Encryption using 3D Chaotic Map with AES key Dependent S-Box" *IJCSNS International Journal of Computer Science and Network Security*, VOL.16 No.10, October 2016.
- [4]. J. M. Barton, "Method and apparatus for embedding authentication information within digital data," U.S. Patent 5646997, Jul. 8, 1997.
- [5]. Z. Ni, Y.-Q. Shi, N. Ansari, and W. Su, "Reversible data hiding," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 16, no. 3, pp. 354-362, Mar. 2006.
- [6]. Wang, Wei-Jen, Cheng-Ta Huang, and Shiuh-Jeng Wang. "VQ applications in steganographic data hiding upon multimedia images." *IEEE Systems Journal* 5.4 (2011): 528-537.
- [7]. Kede Ma, Weiming Zhang, Xianfeng Zhao, Nenghai Yu, Fenghua Li, "Reversible Data Hiding in Encrypted Images by Reserving Room Before Encryption", *IEEE Trans on Information Forensics and security*, Vol. 8, No. 3, March 2013.
- [8]. F. Mintzer, J. Lotspiech, and N. Morimoto, "Safeguarding digital library contents and users: Digital watermarking," *D-Lib Mag.*, Dec. 1997.
- [9]. Jun Tian, "Reversible Data Embedding Using a difference Expansion", *IEEE Transaction on circuits and systems for video technology*, Vol.13, No. 8, Aug 2003.
- [10]. Zhenxing Qian; Xinpeng Zhang and Shuozhong Wang, " Reversible Data Hiding in Encrypted JPEG Bitstream", *IEEE Transactions on Multimedia*, vol:16, pp:1486-1491, 2014
- [11]. Wen Chung Kuo, Po Yu Lai, Lih Chyau Wu, "Adaptive Reversible Data Hiding Based on Histogram", 10th International Conference on Intelligent Systems Design and Application, © IEEE 2010.
- [12]. Chin-Chen Chang, Yi-Pei Hsieh and Chih-Yang Lin, " Lossless Data Embedding With High Embedding Capacity Based on De-clustering for VQ-Compressed Codes, " *IEEE Transactions on Information Forensics and Security*, vol:2, pp:341-349, 2007.
- [13]. Siddharth Malik, Anjali Sardana, Jaya, "A Keyless Approach to Image Encryption", international conference on Communication systems and Network Technologies, IEEE, 2012.
- [14]. Dr. T. Bhaskara Reddy, Miss. Hema Suresh Yaragunti , Mr. T. Sri Harish Reddy, Dr. S. Kiran " An Effective Algorithm of Encryption and Decryption of Images Using Random Number Generation Technique and Huffman coding" Hema Suresh Yaragunti et al, *Int. J. Computer Technology & Applications*, Vol 4 (6),883-891
- [15]. InKoo Kang, Gonzalo R. Arce , Heung-Kyu Lee, " Color Extended visual cryptography using error diffusion", *ICASSP 2009 © IEEE 2009* .
- [16]. J. Fridrich and M. Goljan, "Lossless data embedding for all image formats," in *Proc. SPIE Proc. Photonics West, Electronic Imaging, Security and Watermarking of Multimedia Contents*, San Jose, CA, USA, Jan. 2002, vol. 4675, pp. 572-583
- [17]. Wei Qiao, Hongdong Huaqing Liang, "A kind of Visual Cryptography Scheme For color Images based on halftone technique", *International Conference on Measuring Technology and Mechatronics automation*, 2009 IEEE.